

DAEHAN SENSOR



Digital Liquid Indicate
with level controller

DQC – Series
Level Indicator with Relay Output

Product Name
DQC – 4U – M – 2W



MAKRO-VIETNAM

INNOBIZ



ISO 9001 인증업체

Table of Contents

1. Introduction	3
2. Specification	3
3. Dimensions	4
4. Wiring Connection	5
5. Display Operation	6
6. Check Point Before A/S	8

SPECIFICATIONS

Introduction

This DQC-4U-M-2W Series Level Controller gets signal from each point of the sensor installed in the tank and displays the level of the liquid in the tank as points.

Using a converter for 2-wire transmission, this changes contact signal to current.

LED display enables you to read the current status correctly and easily.

This is designed to control one Alarm Relay and 2 of Control Relay which activates the connected pump.



After operating START1, START2 operates sequentially.

After 2 STARTs operating, HIGH ALARM operates.


Specification

- ▶ Power Supply AC110V / 220V \pm 10%, 50/60Hz
- ▶ Operating Temperature 0°C ~ 60°C
- ▶ Dimensions 87mm (Wide) x 155mm (High) x 69mm (Deep)
- ▶ Material Polycarbonate & A,B,S
- ▶ Max. Switching Current Capacitor 1250VA, 150W
- ▶ Max. Switching Voltage 250VDC, 30VDC
- ▶ Max. Switching Current 5A

Dimensions

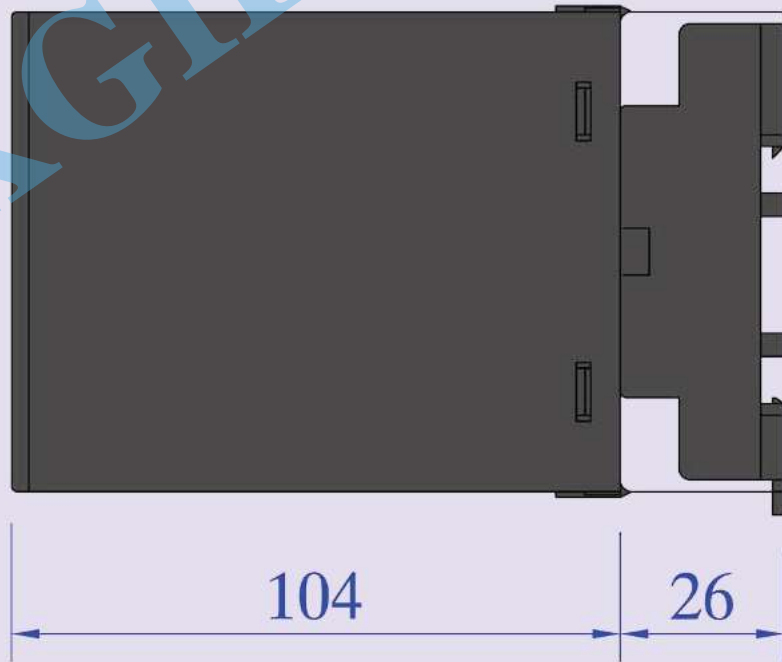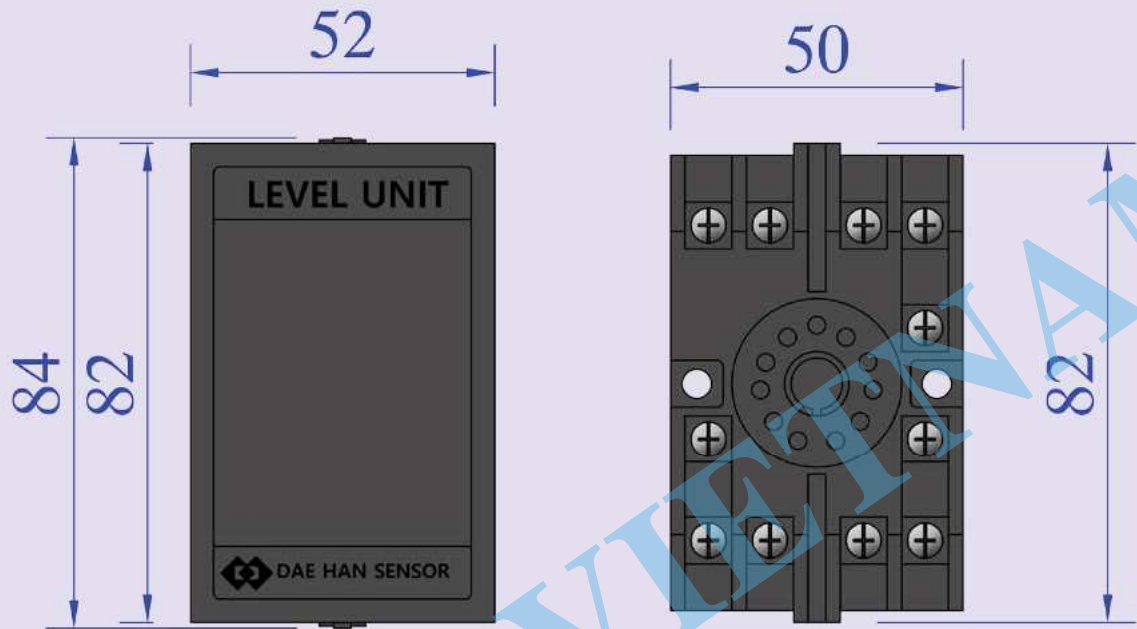


Wiring Connection

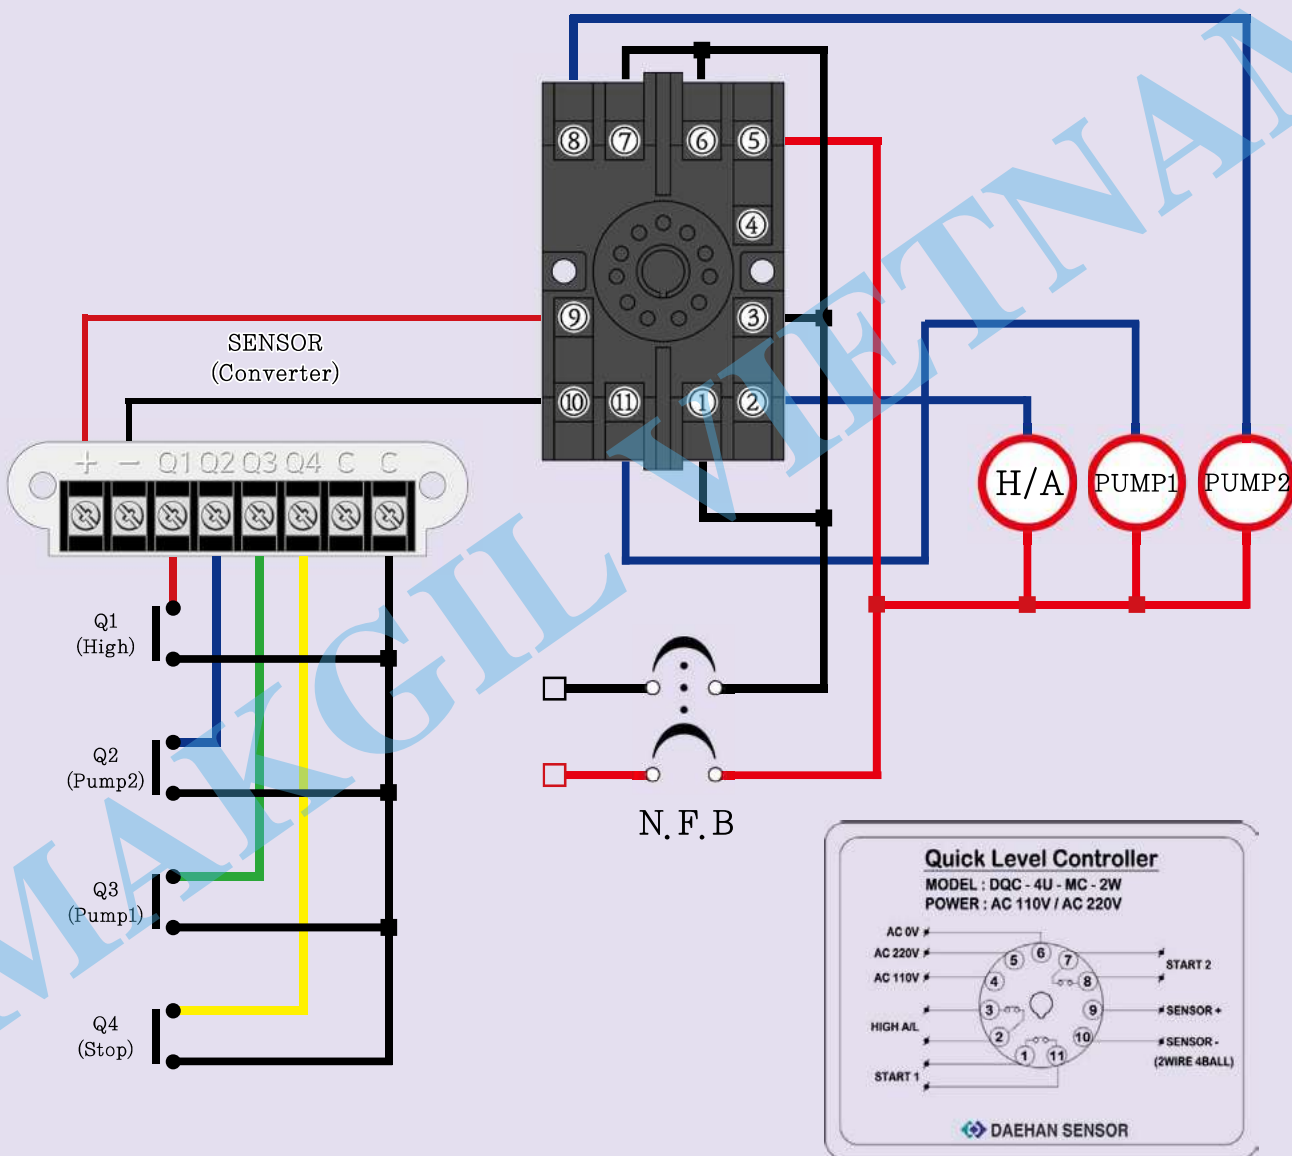


Terminal – Features & description

Display Operation


1. High Level Display

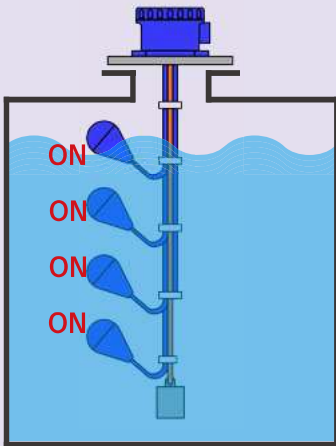


When the liquid level goes up to reach the HIGH/A point, the HIGH/A & START1 & START2 indicator turns on. At the same time, the HIGH/A & START1 & START2 contact signal activates the connected buzzer and pump.

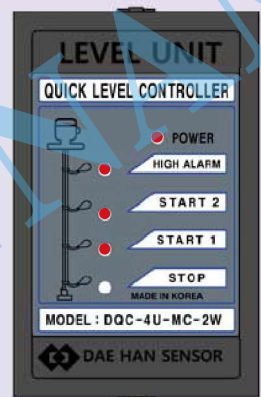

2. Control "Off" Level Display

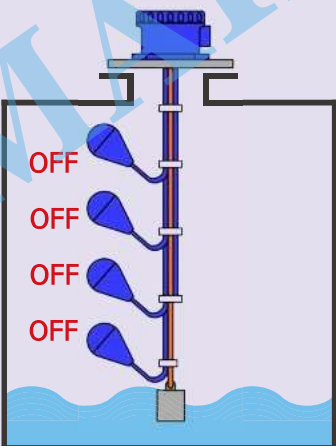


When the liquid level goes up to reach the STOP point, the STOP indicator turns on. At the same time, the CONTROL contact signal is not out and deactivates the connected pump.

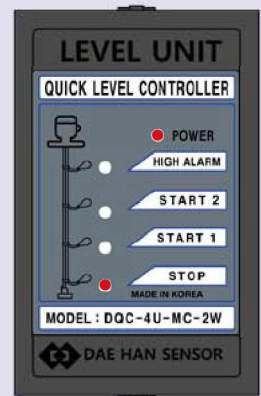


Display Operation


1. START "1" – Control "On" Level Display

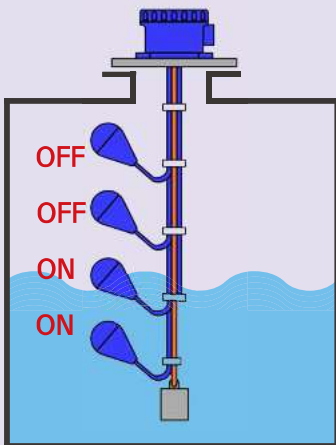


When the liquid level goes Down to reach the START1 point, the START1 indicator turns on. At the same time, the START1 contact signal activates the connected pump.

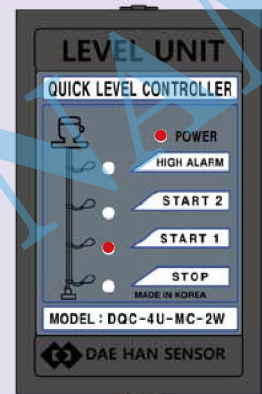

2. START "2" – Control "On" Level Display

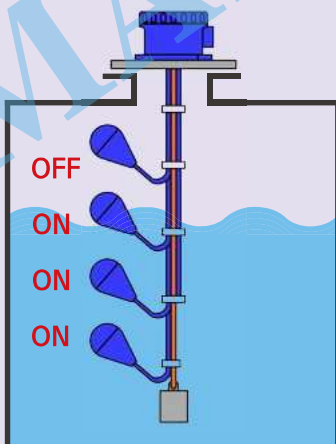

When the liquid level goes Down to reach the START2 point, the START2 indicator turns on. At the same time, the START2 contact signal activates the connected pump.

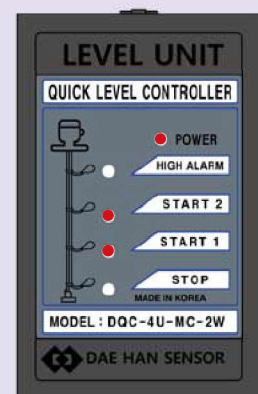

Check & A/S

If you find any abnormal system during operation, please try to check below points.

1. Is the power connected to AC110V or AC220V correctly?
2. Is the wiring to the sensor made correctly?
3. Is the contact with the relay built up through correct sequence?
4. Is the current input from the sensor correct?
5. Is there any malfunction around the unit?

If the trouble still exists, please kindly contact below.

* Installation and operation manual is subject to change without prior notice for quality improvement.

Head Office
94-2, Yongdap-dong, Seongdong-gu, Seoul, Korea

R&D Office
2-71, Jeonong-dong, Dongdaemun-gu, Seoul, Korea

Tel : 02-2213-9888(代) Fax : 02-2245-3482
e.mail : master@dh34.com Domain : www.dh34.com